

FIG. 1





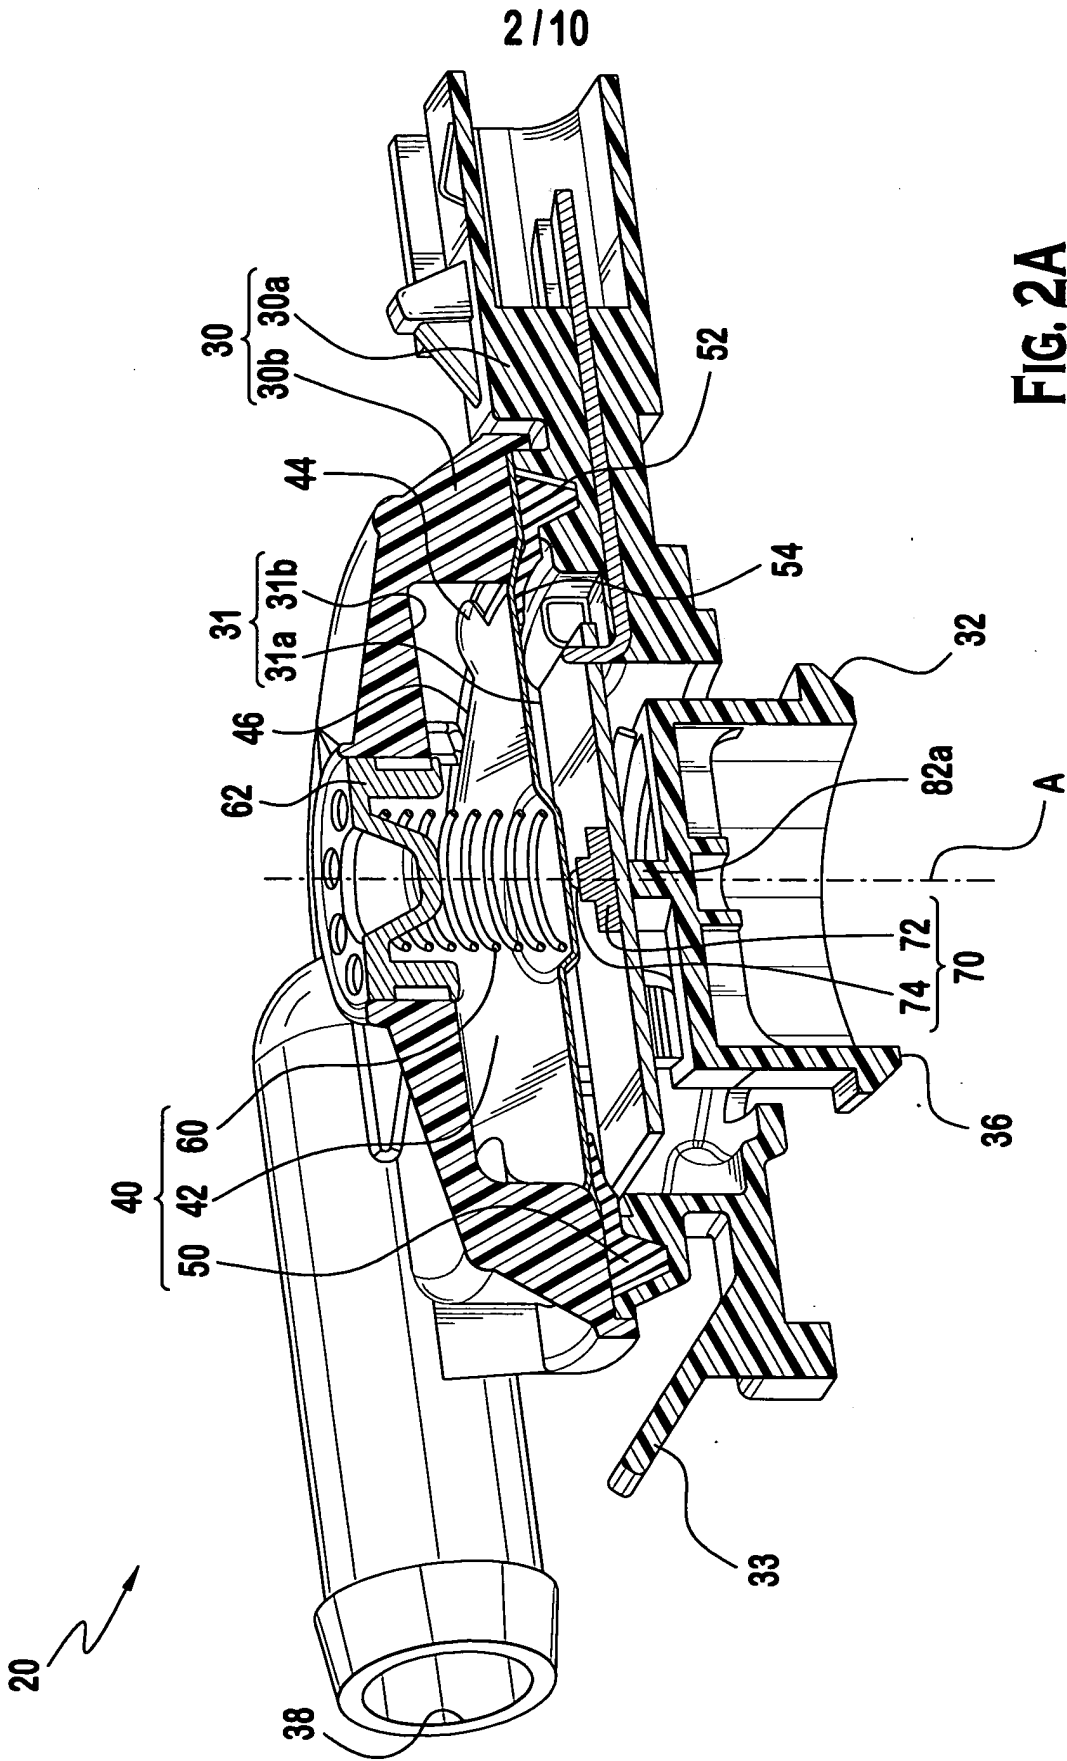


FIG. 2A

FIG. 2B

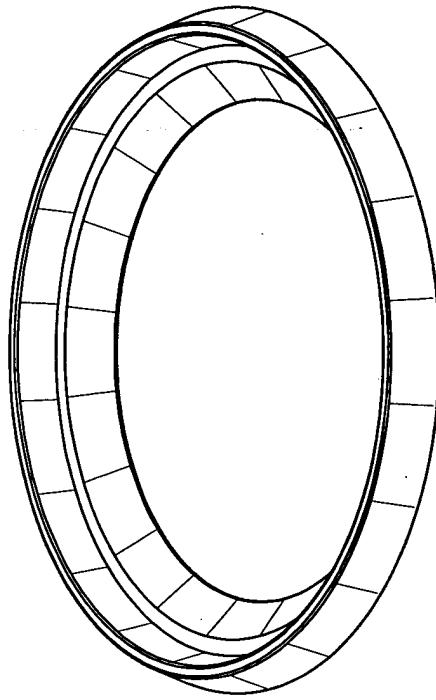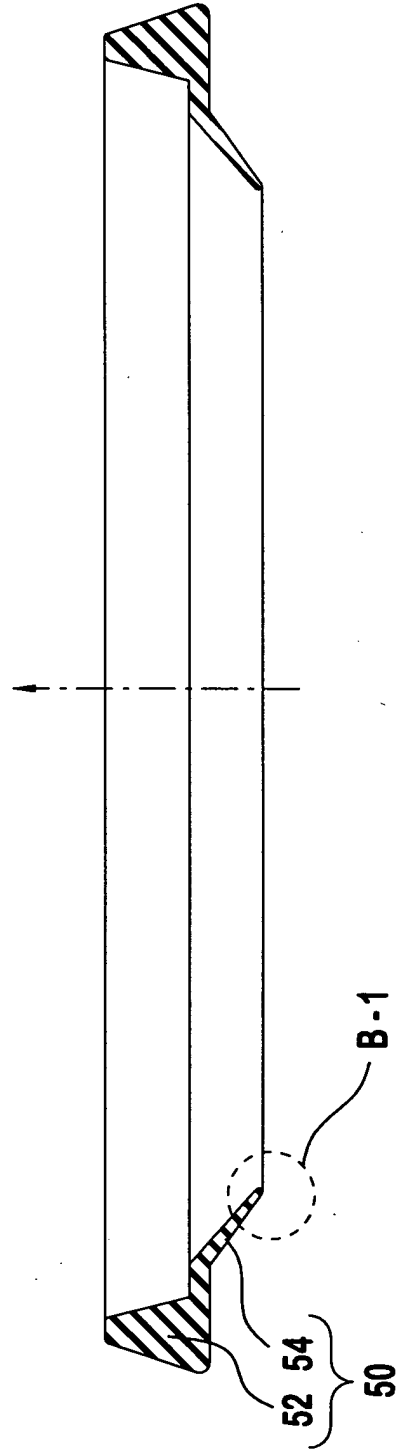

DETAIL B-1



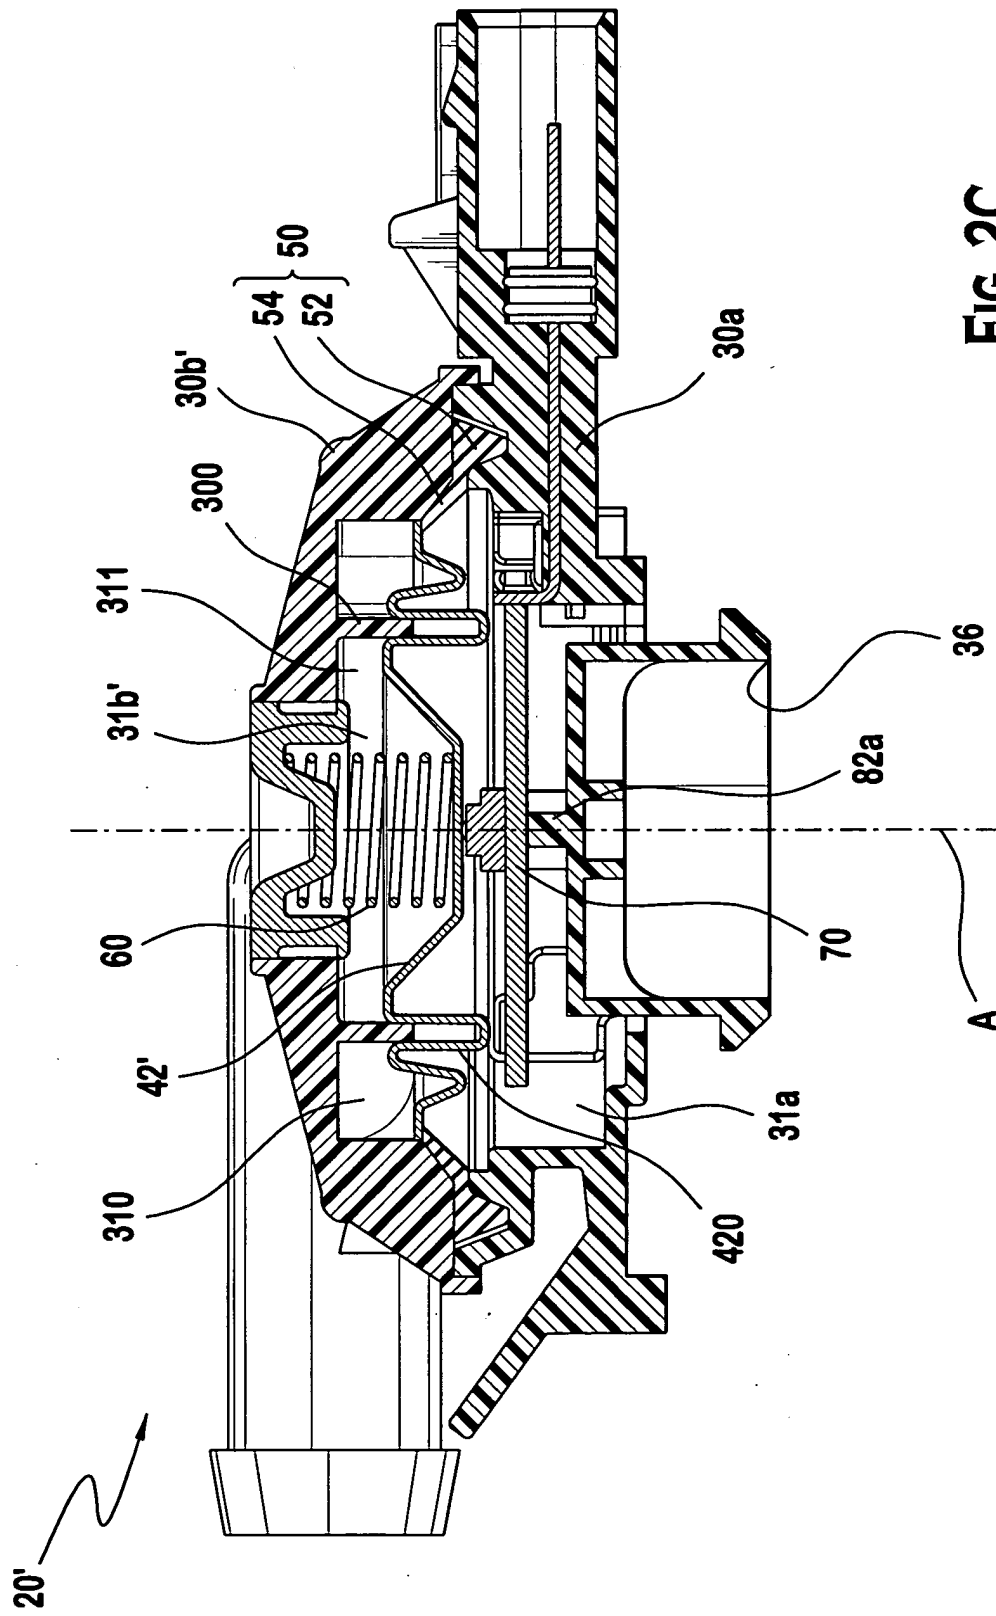


FIG. 2C

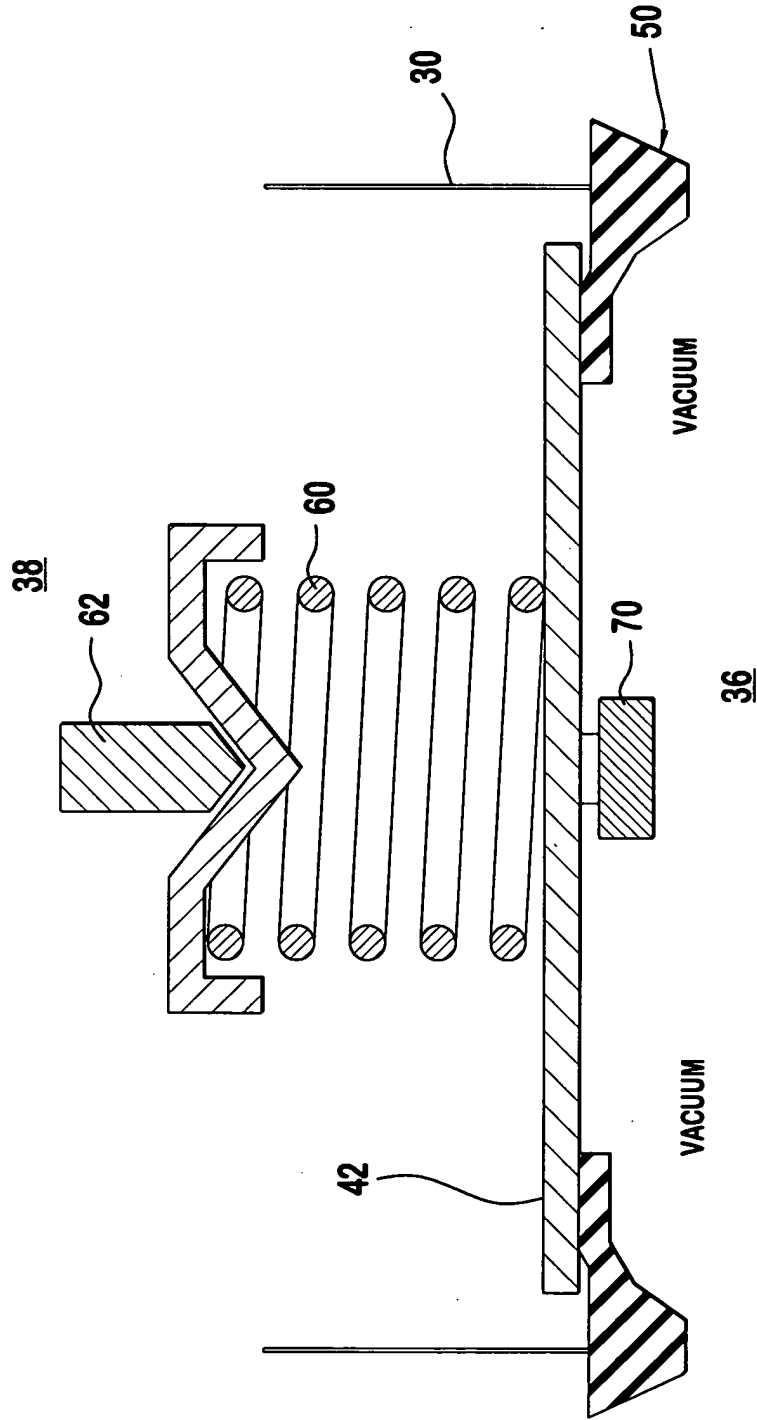


FIG. 3A

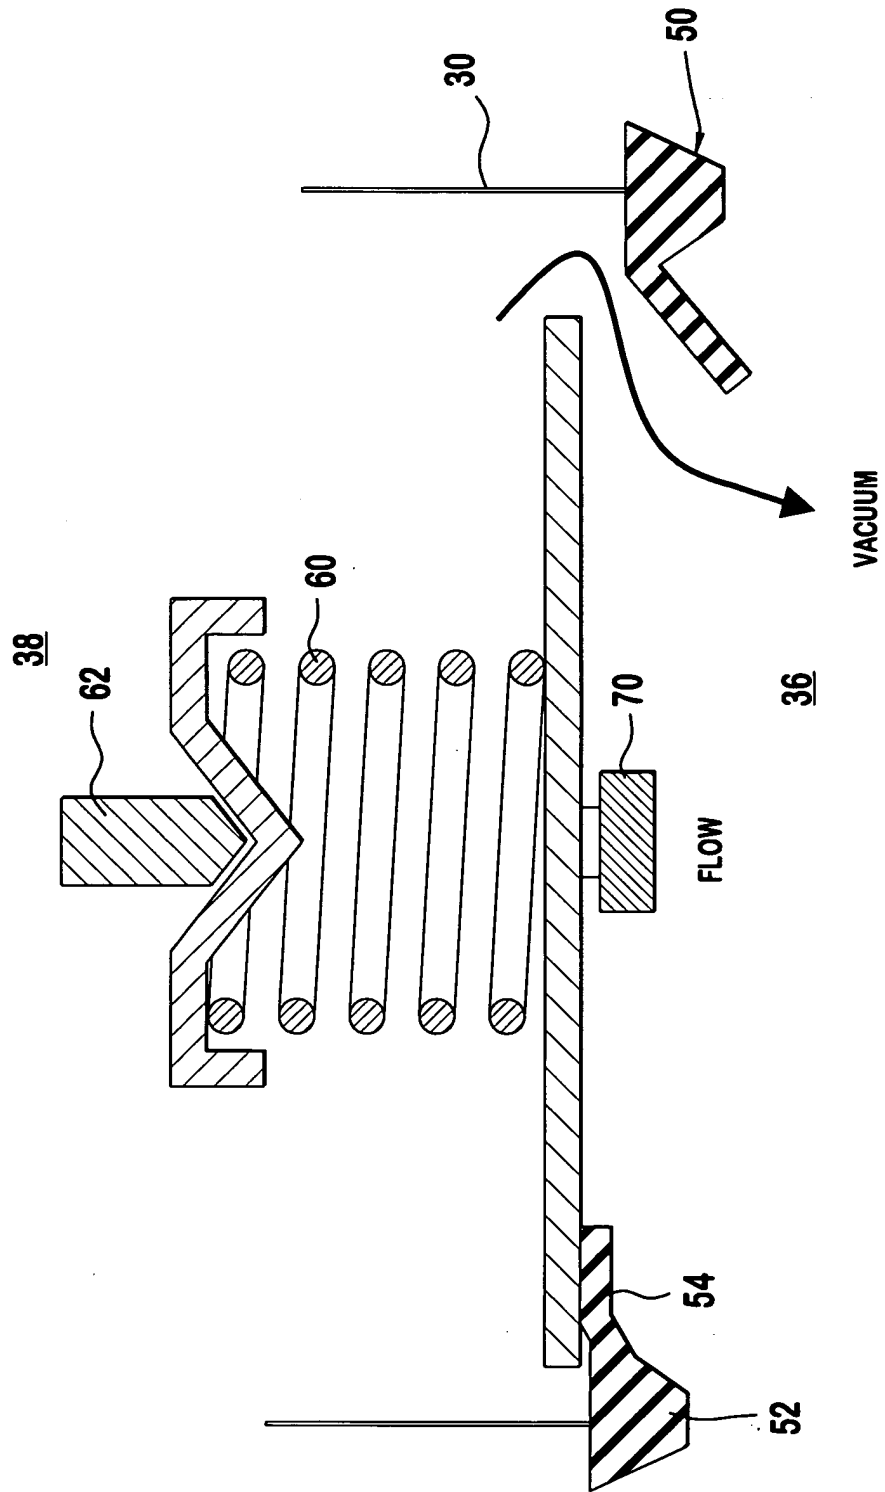


FIG. 3B

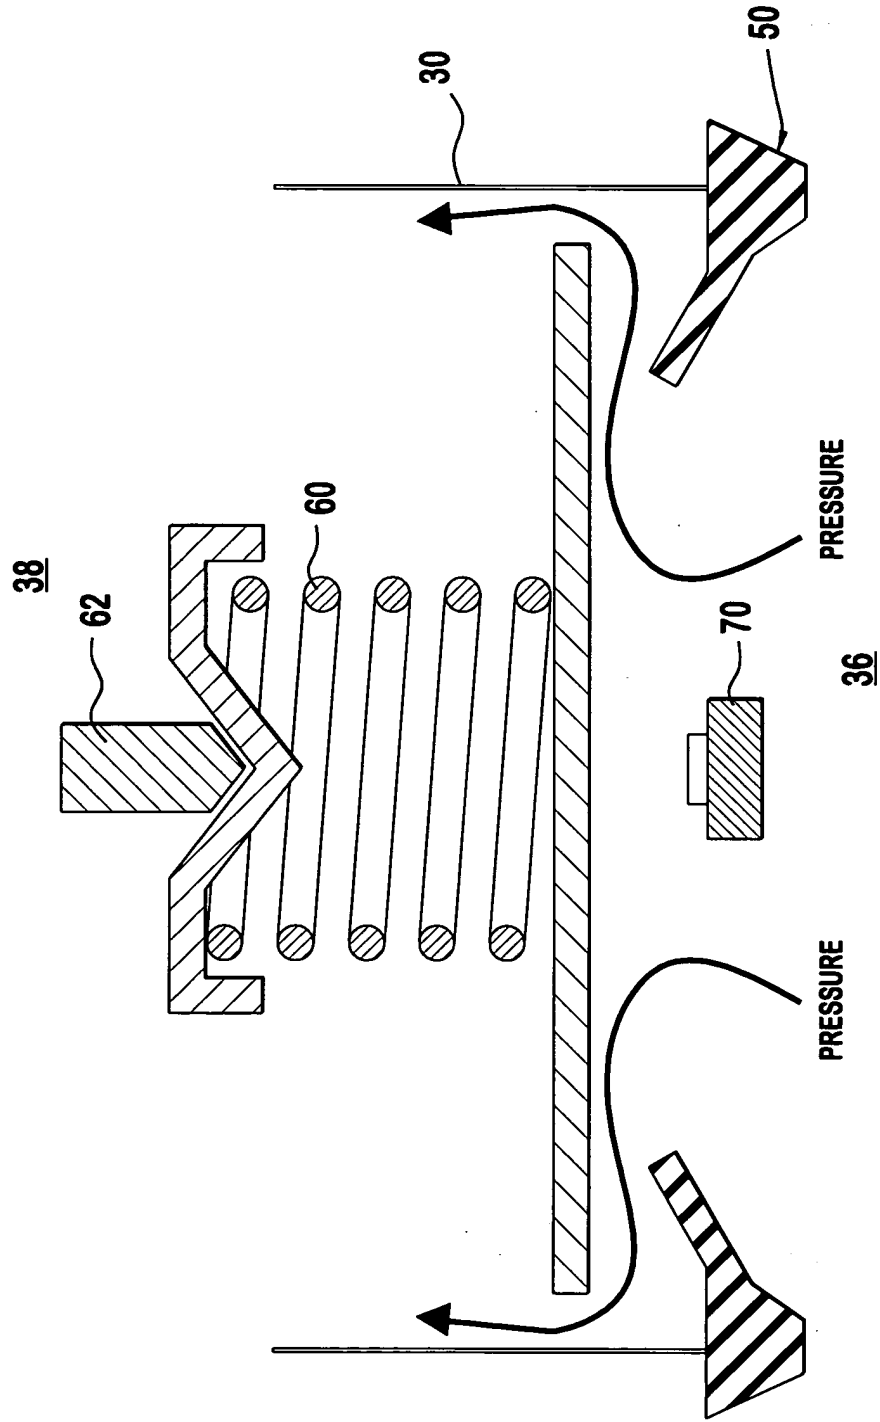


FIG. 3C

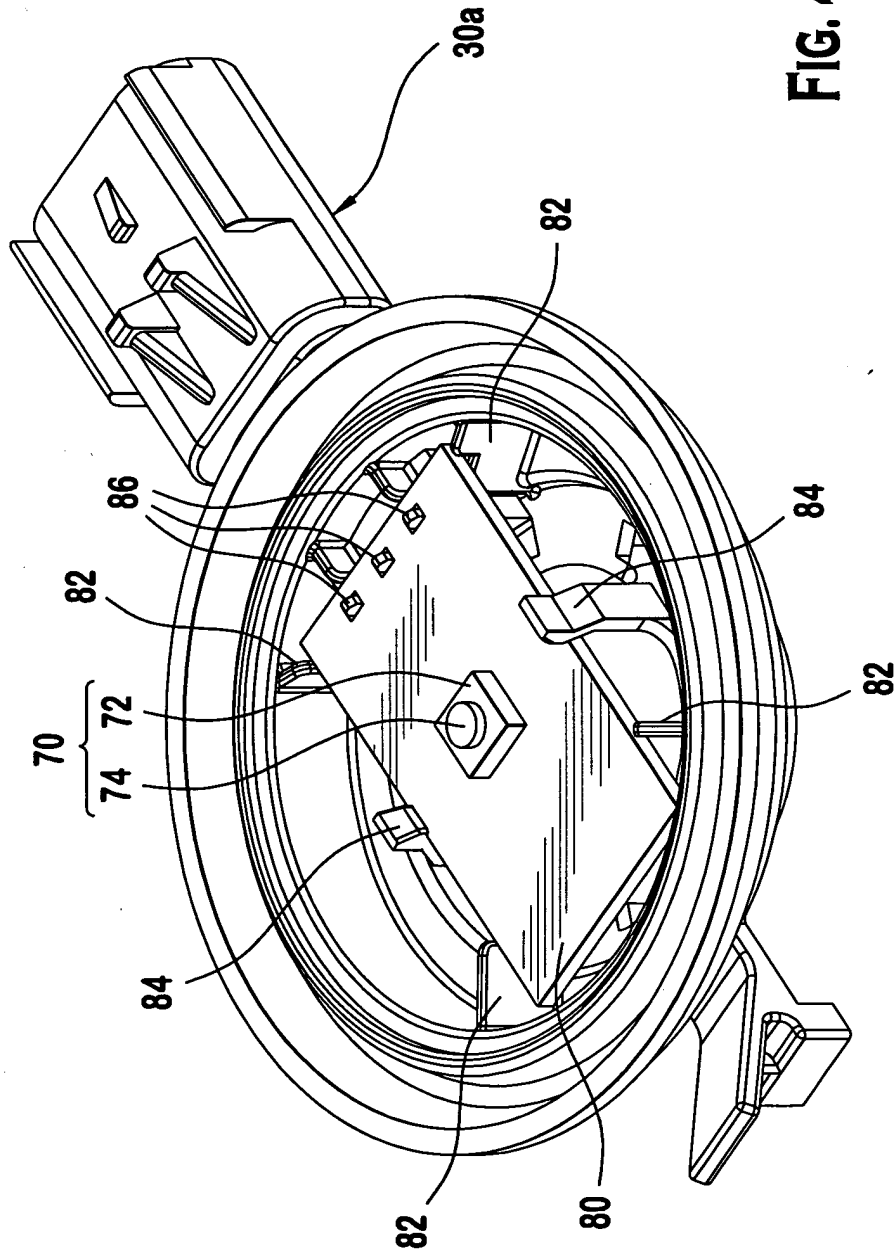


FIG. 4

FIG. 5A

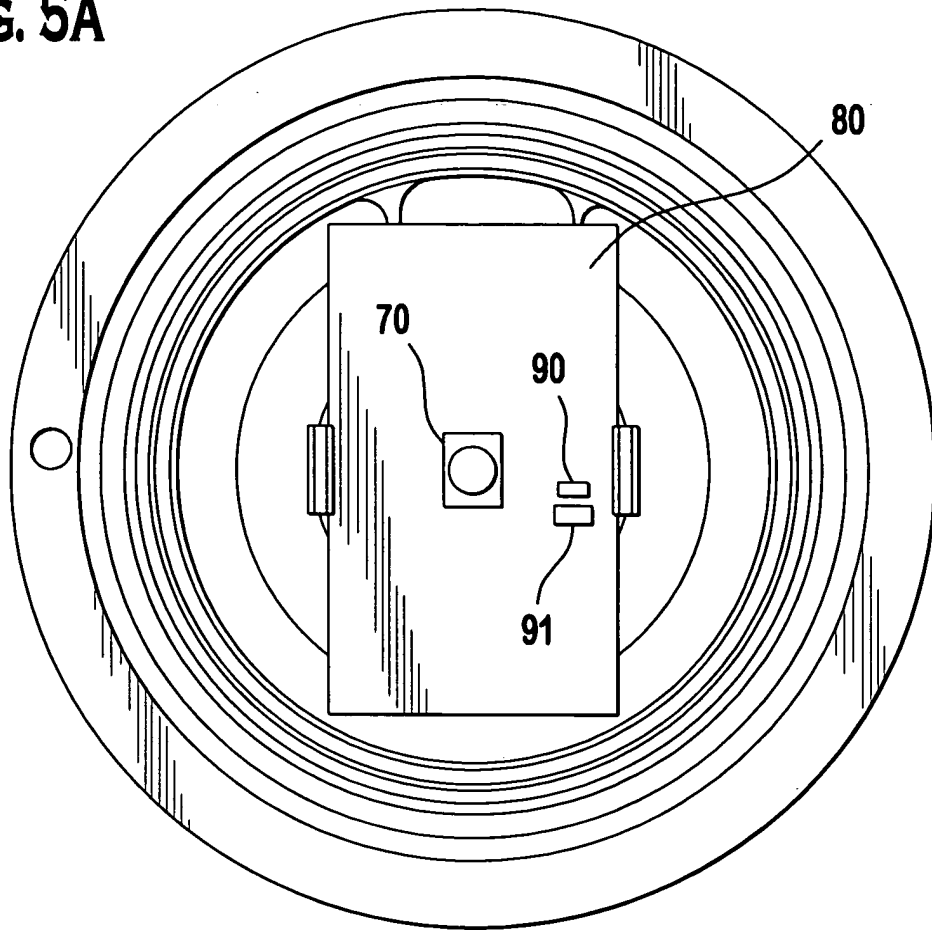


FIG. 5B

STEP CHANGE IN FLOW: 0-80 SLPM
AMBIENT TEMPERATURE: 20 DEGREES C
HEATING RESISTOR: 100% PWM

